


1. (CTR: .50% $I_F=5\text{mA}$, $V_{CE}=5\text{V}$)
 2. ($V_{ISO}=5,000\text{Vrms}$)
 3. (tr: TYP. 4 μs $V_{CE}=2\text{V}$, $I_C=2\text{mA}$, $R_L=100$)
 4. UL (.E236324)
 5. CSA (.218896)
 6. VDE (.40007240)
 7. TUV (.R50029014)

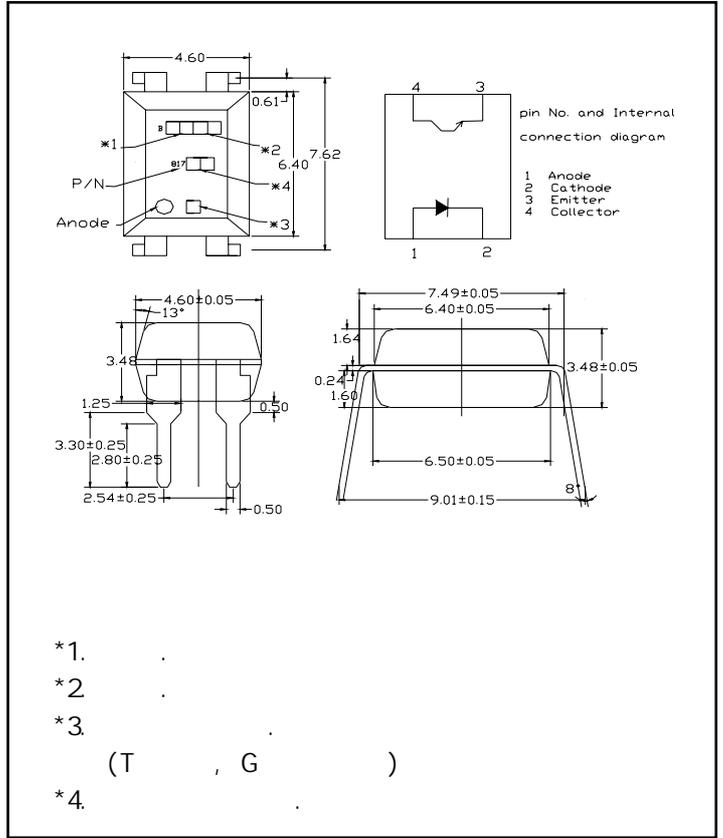

1. BPC-817 NPN GaAs
 2. BPC-817 BIN 2.54mm

1.
2.
3.
4.
5.

(=25)

		I_F	50	mA
		V_R	6	V
		P	70	mW
		V_{CEO}	35	V
		V_{ECO}	6	
		I_C	50	mA
		P_C	150	mW
		P_{tot}	200	mW
	*1	V_{iso}	5,000	Vrms
		V_{IOTM}	6,000	V
		V_{IORM}	630	V
		T_{opr}	-30 to + 100	
		T_{stg}	-55 to + 125	
	*2	T_{sol}	260	

*1. =40~60%

- (1)
(2)
(3)

*2. 10

(=25)

				.	.		
		V_F	$I_F=20\text{mA}$	---	1.2	1.4	V
		I_R	$V_R=4\text{V}$	---	---	10	μA
		C_t	$V=0, f=1\text{KHz}$	---	30	250	pF
		I_{CEO}	$V_{CE}=20\text{V}, I_F=0$	---	---	100	nA
		BV_{CEO}	$I_C=0.1\text{mA}$ $I_F=0$	35	---	---	V
		BV_{ECO}	$I_E=10\mu\text{A}$ $I_F=0$	6	---	---	V
		I_c	$I_F=5\text{mA}$	2.5	---	30	mA
	*1	CTR	$V_{CE}=5\text{V}$	50	---	600	%
		$V_{CE(sat)}$	$I_F=20\text{mA}$ $I_C=1\text{mA}$	---	0.1	0.2	V
		R_{iso}	DC500V 40~60%R.H.	5×10^{10}	1×10^{11}	---	
		C_f	$V=0, f=1\text{MHz}$	---	0.6	1	pF
		f_c	$V_{CE}=5\text{V},$ $I_C=2\text{mA}$ $R_L=100 \Omega,$ -3dB	---	80	---	kHz
		t_r	$V_{CE}=2\text{V},$ $I_C=2\text{mA}$	---	4	18	μs
		t_f	$R_L=100 \Omega$	---	3	18	μs

*1 $\text{CTR} = I_C / I_F \times 100\%$

	. (%)	. (%)
L	50	100
A	80	160
B	130	260
C	200	400
D	300	600
L or A or B or C or D	50	600

Fig.1 Forward Current vs. Ambient Temperature


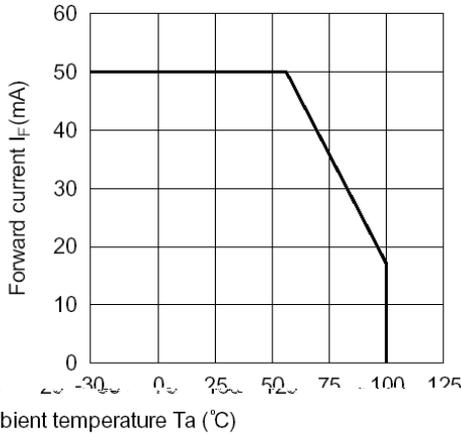


Fig.2 Collector Power Dissipation vs. Ambient Temperature

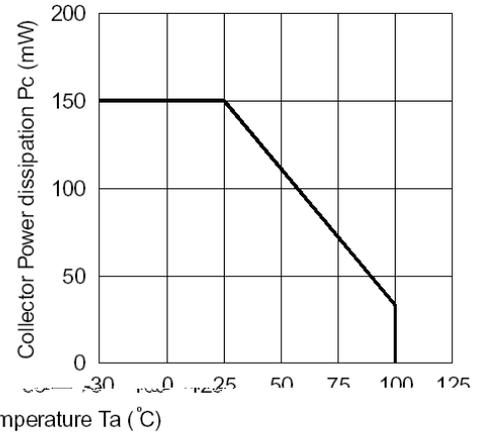

Forward Current vs. Forward Voltage

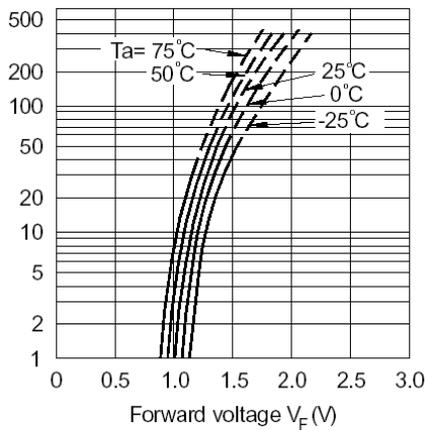


Fig.3 Collector-emitter Saturation Voltage vs. Forward Current

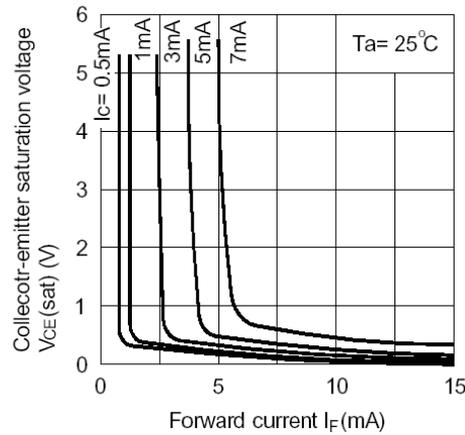


Fig.4

Forward current I_F (mA)

Collector Current vs. Collector-emitter Voltage

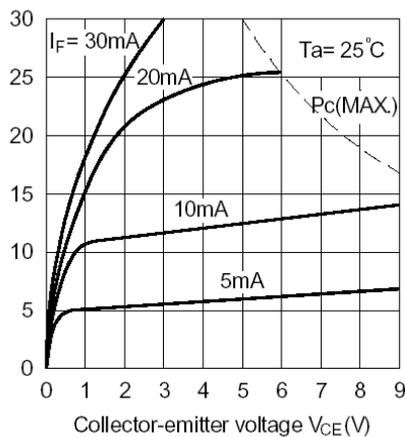


Fig.5 Current Transfer Ratio vs. Forward Current

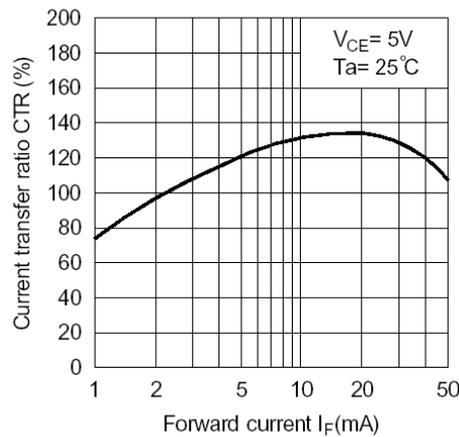


Fig.6

Collector current I_c (mA)

Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

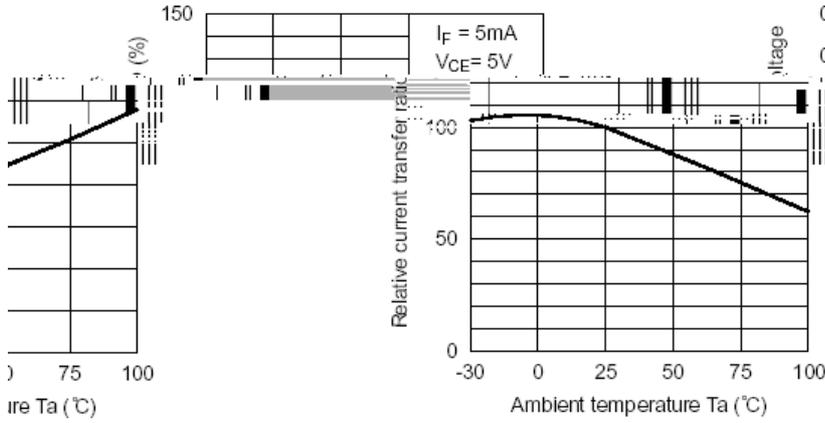


Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature

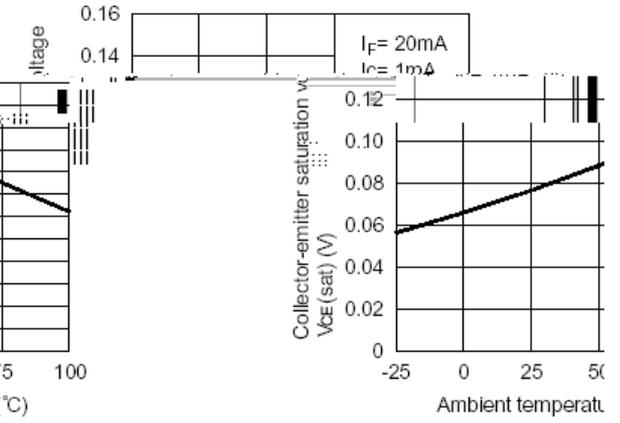


Fig.9 Collector Dark Current vs. Ambient Temperature



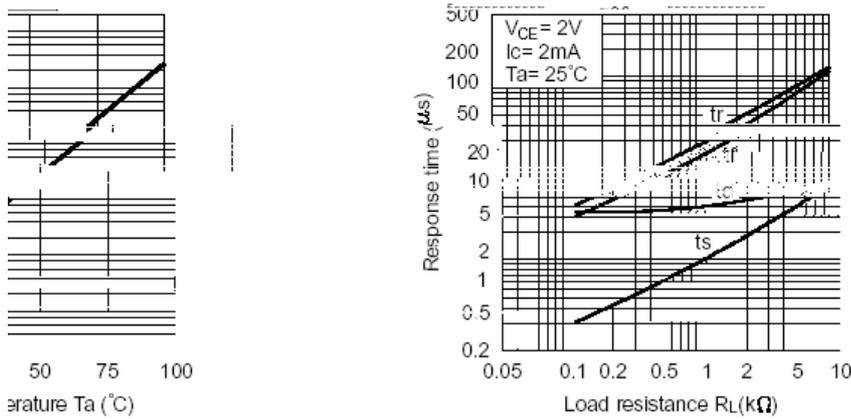


Fig.10 Response Time vs. Load Resistance

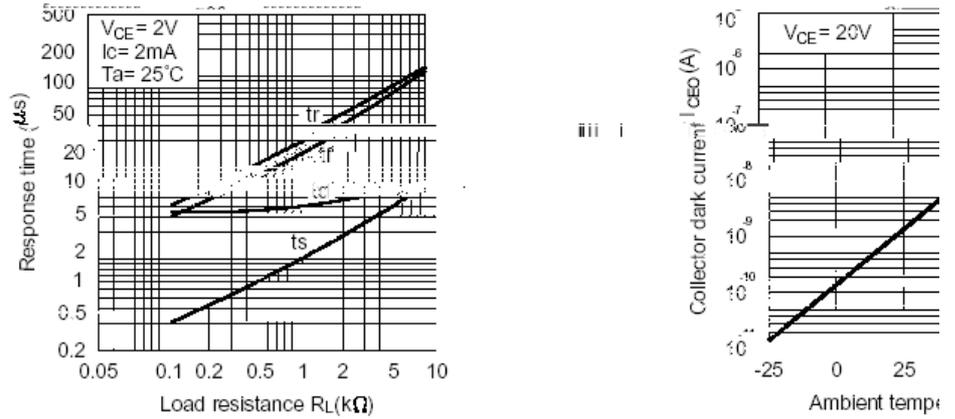

Test Circuit for Response Time

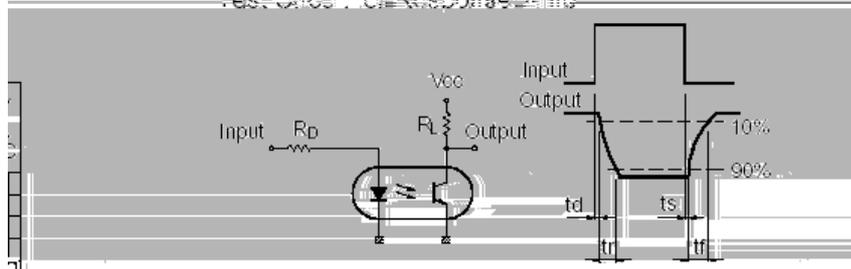

Test Circuit for Frequency Response


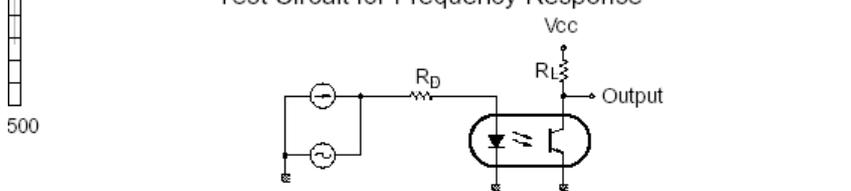


Fig.11 Frequency Response

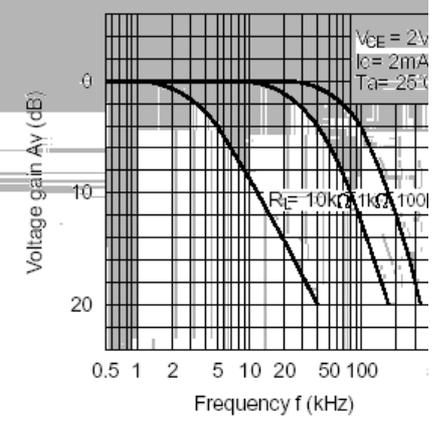

:R

" 1