


# 24E RoHS Compliant

Time-Current Characteristics  
电流-时间特性曲线图

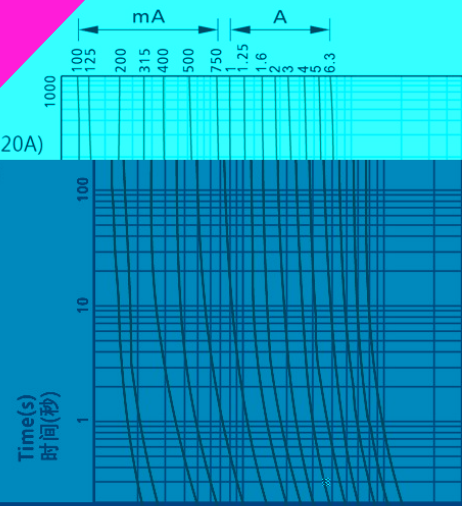

Soldering Method:  
Wave soldering: 260°C, 10s max  
Manual soldering: 380°C, 3s max

< 120s

6H30V G30V A20V B12V

Part Number	Current	Voltage	RoHS	Other
24012HGAB	125A	35V/30V/25V/12V	011	
24016HGAB	160A	35V/30V/25V/12V		
24020HGAB	200A	35V/30V/25V/12V		
24025HGAB	250A	35V/30V/25V/12V		
24036HGAB /B	300A	35V/30V/25V	011	

