


## Dual High Voltage Schottky Rectifier

### ●Features:

- 
- 
- 
- 

### ●Application:

- 
- 
- ,

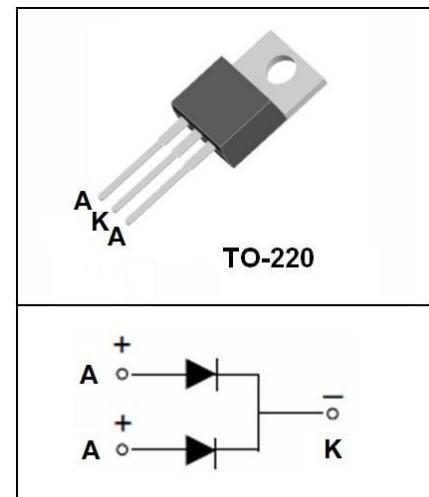

### Absolute Maximum Ratings( 2 ° )

Symbol	Parameter	Value	Unit
		100	
		100	
( )	, 120°C	( ) 10( )	
	, .3	100	
		1 0	°
		- +1 0	°

### Thermal Characteristics( 2 ° )


Symbol	Parameter	Max	Unit
	,	2.	° /
	,	10	° /

### Electrical Characteristics( 2 ° )


Symbol	Parameter	Test Conditons	Min	Max	Unit
--------	-----------	----------------	-----	-----	------

## Typical Performance Characteristics


**Figure 1. Forward Current Characteristics**

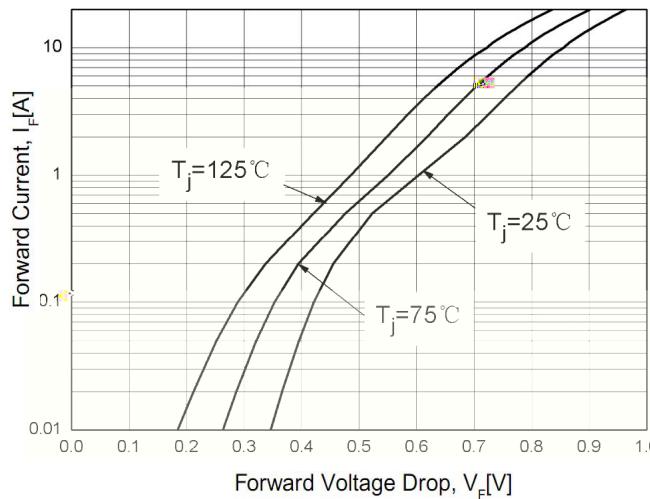


**Figure 2. Reverse Leakage Current**

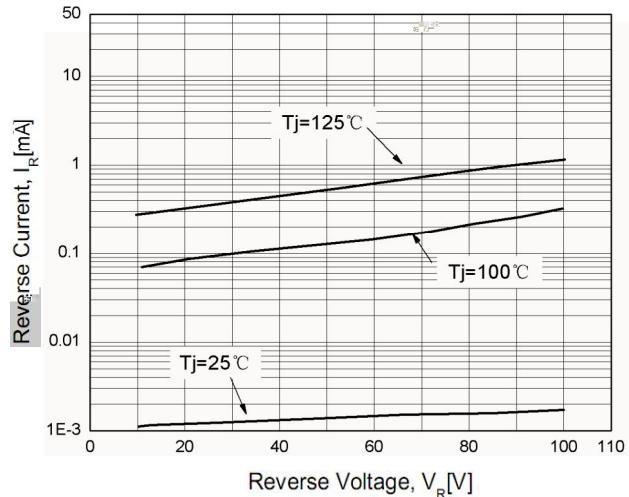

**Figure 3. Junction Capacitance**

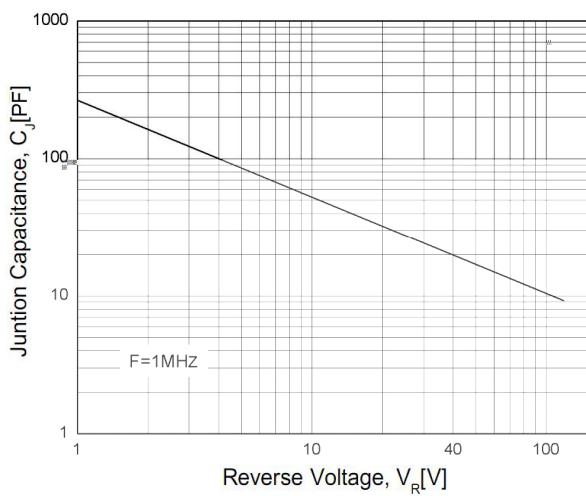

**Figure 4. Power Derating**

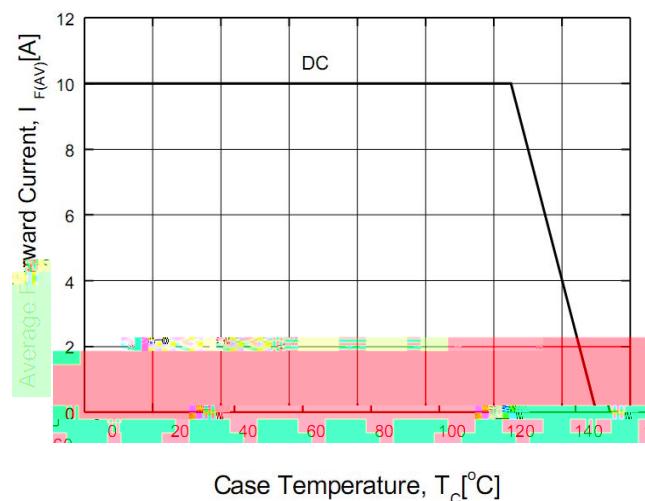

### TO-220 MECHANICAL DATA

	.00	.0	.0	10. 0
	1.1	1.		2.
1	0. 0	1. 0	1.10	1. 0
1	0.	0.	12. 0	1 . 0
	0.30	0. 0	1	2. 0
	1 . 0	1 . 0		3. 0
1	. 0	. 0	1	2.00
			ϕ	3. 0
				.00

